

# URBAN PLUS 50

— By ITEMDesign Works Javier Cuñado —



## DESCRIPTION

**Back rest:** Polypropylene + 30%fv + 20%pop frame.

Upholstered with foamized fabric composed of polyurethane foam (20Kg/m3) 5mm + fabric "T" or 10mm polyurethane foam (20Kg/m3) + fabric M..

**Seat:** Polypropylene (P.P) with 40 % fiber glass, Upholstered with an ergonomic padded interior (40Kg/m3) in different finishes.

Ability to incorporate fibreglass into polypropylene (P.P) **arms** for reinforcement.

**Frame** made from 2 mm thick hot-rolled steel cylindrical tube, coated in epoxy with different finishes, 90 microns thickness. Different finishes: **Silver, white, black or chromed**. Includes protective stacking.

## ACCESSORIES



**Optional** Hook on basket Ø 5 mm thickness with supports Ø 7 mm thickness. **Aluminum, white or black finish**




Optional writing tablet in 13 mm phenolic thick, on the right or left hand side



Polypropylene (P.P) linking devices. 5 mm thickness

## STICKABILITY

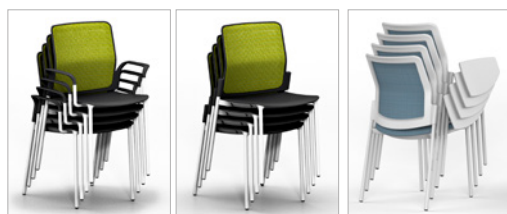

Stackable chairs





- 1 Polyamide frame manufactured with glass fibre
- 2 Models with and without polypropylene arms (P.P).  
**Optional** writing table in models without arms
- 3 Upholstered seat with an ergonomic padded interior, in different finishes
- 4 Cast aluminum framework, in white, black or aluminum finishes
- 5 Protective stacking
- 6 Steel cylindrical tube in different finishes: **Silver, white, black or chromed**
- 7 Graphite caps with felt silent pad-anti scratch.



## DIMENSIONS

Total Height: 870 mm  
Total Width: 520 - 590 mm  
Total Depth: 535 mm

Seat Height: 470 mm  
Seat Width: 460 mm  
Seat Depth: 450 mm



## DESCRIPTION

**Back rest:** Polypropylene + 30%fv + 20%pop frame.


Upholstered with foamized fabric composed of polyurethane foam (20Kg/m3) 5mm + fabric "T" or 10mm polyurethane foam (20Kg/m3) + fabric M.

**Seat:** Polypropylene (P.P) with 40 % fiber glass, Upholstered with an ergonomic padded interior (40Kg/m3) in different finishes.

Ability to incorporate fibreglass into polypropylene (P.P) **arms** for reinforcement.

**Frame** made from 2 mm thick hot-rolled steel cylindrical tube, coated in epoxy with 90 microns thickness. Different finishes: **Silver, white or chromed.**

## DIMENSIONS

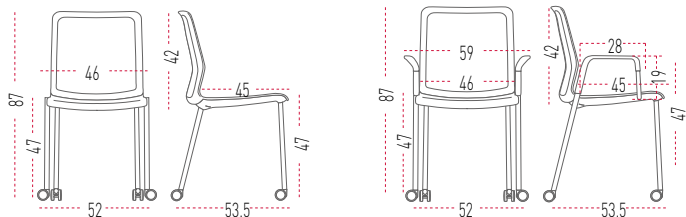

## DIMENSIONS

Total Height: 870 mm

Total Width: 450 mm

Total Depth: 535 mm

Seat Height: 470 mm

Seat Width: 460 mm

Seat Depth: 450 mm



- 1 Polyamide frame manufactured with glass fibre
- 2 Models with and without polypropylene arms (P.P)
- 3 Upholstered seat with an ergonomic padded interior, in different finishes
- 4 Cast aluminum framework, in white, black or aluminum finishes
- 5 Steel cylindrical tube in different finishes: **Silver, white or chromed**
- 6 Ø 45 mm solft castors

## CASTORS



Ø 45 mm solft castors

## ■ DESCRIPTION

**Back rest:** Polypropylene + 30%fv + 20%pop frame. Upholstered with foamized fabric composed of polyurethane foam (20Kg/m3) 5mm + fabric "T" or 10mm polyurethane foam (20Kg/m3) + fabric M.

**Seat:** 10 mm thickness natural beech plywood lacquered sheets placed in perpendicular or transversal position. Upholstered with an ergonomic padded interior (40Kg/m3) in different finishes.

**Frame cantilever:** Manufactured with warm laminated steel cylinder tube (Ø 20 mm), 1,5 mm thickness epoxy covered, available in different finishes, 90 micron thickness. Incorporate fibreglass into polypropylene (P.P) **arms** for reinforcement.




- ① Polyamide frame manufactured with glass fibre
- ② Models with polypropylene arms **(P.P)**
- ③ Upholstered seat with an ergonomic padded interior, in different finishes
- ④ Steel cylindrical tube in different finishes: **Silver, white or chromed**
- ⑤ Graphite caps



Stackable chairs (max. 4 chairs)

## ■ DIMENSIONS



## ■ DIMENSIONS

Total Height: 870 mm  
Total Width: 480 mm  
Total Depth: 560 mm

Seat Height: 470 mm  
Seat Width: 460 mm  
Seat Depth: 450 mm



## ■ DESCRIPTION

**Back rest:** Polypropylene + 30%fv + 20%pop frame.

Upohslltered with foamized fabric composed of polyurethane foam [20Kg/m3] 5mm + fabric "T" or 10mm polyurethane foam [20Kg/m3] + fabric M.

**Seat:** Polypropylene (P.P) with 40 % fiber glass, Upholstered with an ergonomic padded interior (40Kg/m3) in different finishes.

**Arms:** Ability to incorporate fibreglass into polypropylene (P.P) arms for reinforcement.

**Frame: Self return:** Swivel base self-return mechanism.  
Manufactured with warm laminated steel cylinder tube,  
moulded, flatten and conical shape (25-17 mm), 2,5 mm  
thickness epoxy covered with in 90 micron thickness,  
available in different finishes: **Silver, white or chromed.**

**\*The use of the chair with oscillating levelers is recommended on hard floors.**



**BASES**



Steel shaped and tapered tube  
Chromed finish - 52x52 cm.  
Oscillating levels



Steel shaped and tapered tube  
White Finish - 52x52 cm.  
Oscillating levels



Steel shaped and tapered tube  
Silver Finish - 52x52 cm.  
Oscillating levels

## ■ DIMENSIONS

Total Height: 870 mm



Total Width: 520 - 590 mm

Total Depth: 520 mm

Seat Height: 470 mm

Seat Width: 460 mm

Seat Depth: 450 mm

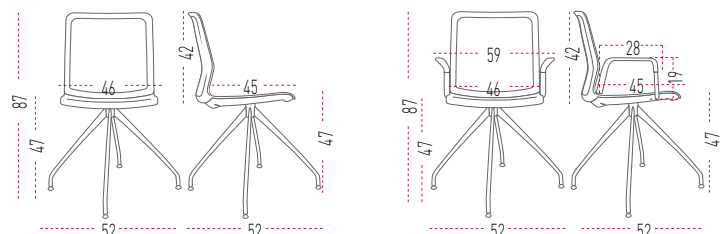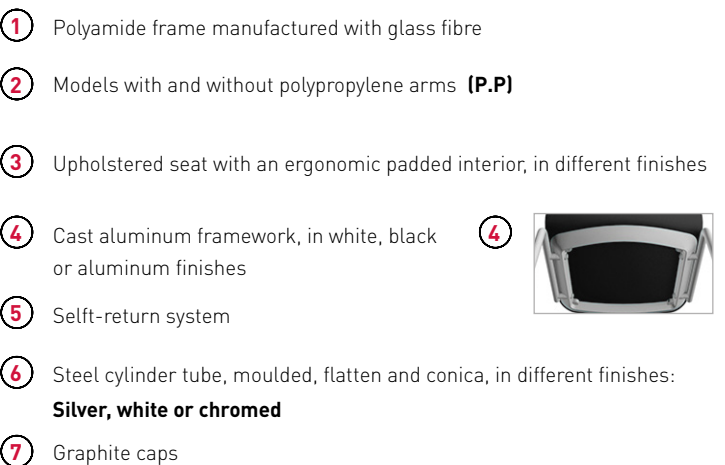

## DESCRIPTION

**Back rest:** Polypropylene + 30%fv + 20%pop frame. Upholstered with foamized fabric composed of polyurethane foam (20Kg/m3) 5mm + fabric "T" or 10mm polyurethane foam (20Kg/m3) + fabric M.

**Seat:** Polypropylene (P.P) with 40 % fiber glass, Upholstered with an ergonomic padded interior (40Kg/m3) in different finishes.

**Arms:** Ability to incorporate fibreglass into polypropylene (P.P) arms for reinforcement.

**Frame: 4 Feet base:** Base Ø 67,5 cm with 4 cross supports, Central support Swivel. Manufactured with warm laminated steel cylinder tube (Ø 50 mm),

1,5 mm thickness epoxy covered, available in different finishes, 90 micron thickness. 4 cross supports with antiskid pad.



## BASES



Black Steel Cylinder Tube  
4 cross supports base - Chrome finish - Ø67,5 cm  
Antiskid pads



White Steel Cylinder Tube  
4 cross supports base - White finish - Ø67,5 cm  
Antiskid pads



Silver Steel Cylinder Tube  
4 cross supports base - Silver finish - Ø67,5 cm  
Antiskid pads



Black Steel Cylinder Tube  
4 cross supports base - Black finish - Ø67,5 cm  
Antiskid pads


- ① Polyamide frame manufactured with glass fibre
- ② Models with and without polypropylene arms (P.P)
- ③ Upholstered seat with an ergonomic padded interior, in different finishes
- ④ Cast aluminum framework, in white, black or aluminum finishes
- ⑤ Central support Swivel
- ⑥ Steel cylinder tube Ø 50 mm and 1,5 mm thickness, **black, aluminized and white finishes**
- ⑦ Base Ø67,5 cm, with 4 cross supports, made of aluminized finish **aluminum, white, black and black/polishedd**. The support arms have antiskid pad



## DIMENSIONS

Total Height: 870 mm  
Total Width: 675 mm  
Total Depth: 675 mm

Seat Height: 470 mm  
Seat Width: 460 mm  
Seat Depth: 450 mm

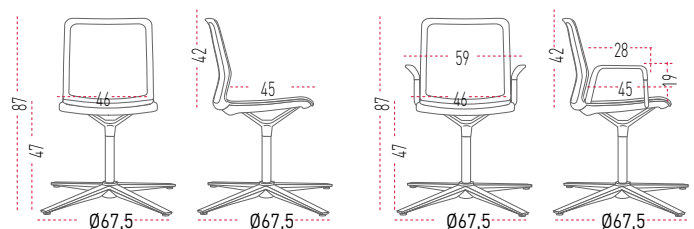

## DESCRIPTION

**Back rest:** Polypropylene + 30%fv + 20%pop frame. Upholstered with foamized fabric composed of polyurethane foam (20Kg/m3) 5mm + fabric "T" or 10mm polyurethane foam (20Kg/m3) + fabric M.

**Seat:** Polypropylene (P.P) with 40 % fiber glass, Upholstered with an ergonomic padded interior (40Kg/m3) in different finishes.

**Frame: Swivel base:** fixed to a moulded aluminium carcasse 4 mm thickness. Swivel base polished aluminium Ø 67,5 cm and 5 stars 6 cm thickness. Inverted auto-break black castor - Ø 60 mm. Gas lift for height adjustment.

## BASES



Swivel black polyamide base - 67,5 cm  
Inverted auto-break black castor - Ø 60 mm



Swivel white polyamide base - 67,5 cm  
Inverted auto-break black castor - Ø 60 mm



Swivel white aluminum base - 67,5 cm  
Inverted auto-break black castor - Ø 60 mm



Swivel polished aluminum base - 67,5 cm  
Inverted auto-break black castor - Ø 60 mm

## OPTIONAL ACCESSORIES



POLYPROPYLENE  
GLIDES

## DIMENSIONS

**Total Height:** 1.040-1.200 mm

**Total Width:** 675 mm

**Total Depth:** 675 mm


**Seat Height:** 590 - 840 mm

**Seat Width:** 460 mm

**Seat Depth:** 450 mm



- 1 Polyamide frame manufactured with glass fibre
- 2 Upholstered seat with an ergonomic padded interior, in different finishes
- 3 Cast aluminum framework, in white, black or aluminum finishes
- 4 Gas lift
- 5 Chromed steel footrest. Curved tube Ø 18 mm, 1,5 mm thickness
- 6 Swivel base Ø 67,5 cm finished in **black polyamide, white polyamide, white aluminium or polished aluminium**
- 7 Inverted auto-break black castor - Ø 60 mm



## DESCRIPTION

**Back rest:** Polypropylene + 30%fv + 20%pop frame. Upholstered with foamized fabric composed of polyurethane foam (20Kg/m3) 5mm + fabric "T" or 10mm polyurethane foam (20Kg/m3) + fabric M.

**Seat:** Polypropylene (P.P) with 40 % fiber glass, Upholstered with an ergonomic padded interior (40Kg/m3) in different finishes.

**Arms:** Ability to incorporate fibreglass into polypropylene (P.P) arms for reinforcement.

**Frame: Swivel base:** 5 spoke swivel base of cast aluminum or polyamide with fiber glass and standard silent wheels. Gas lift. Optional soft hole weight control castor in models with aluminium base.

## BASES



Polished aluminum - Ø 67,5 cm  
Black soft castors - Ø 65 mm  
Optional: soft hole weight control castor - Ø 65 mm



White aluminum - Ø 67,5 cm  
Black soft castors - Ø 65 mm  
Optional: soft hole weight control castor - Ø 65 mm



Aluminized aluminum - Ø 67,5 cm  
Black soft castors - Ø 65 mm  
Optional: soft hole weight control castor - Ø 65 mm



Black polyamide - Ø 67,5 cm  
Black soft castors - Ø 65 mm



White polyamide - Ø 67,5 cm  
Black soft castors - Ø 65 mm

## DIMENSIONS

Total Height: 840-950 mm

Total Width: 675 mm

Total Depth: 675 mm

Seat Height: 420-530 mm

Seat Width: 460 mm

Seat Depth: 450 mm



① Polyamide frame manufactured with glass fibre

② Models with and without polypropylene arms **(P.P)**

③ Upholstered seat with an ergonomic padded interior, in different finishes


④ Cast aluminum framework, in white, black or aluminum finishes



⑤ Gas lift

⑥ Base of 67,5 cm in finishes of **black polyamide, white polyamide, silver aluminum, white aluminium and polished aluminum**

⑦ Soft castors - Ø 65 mm

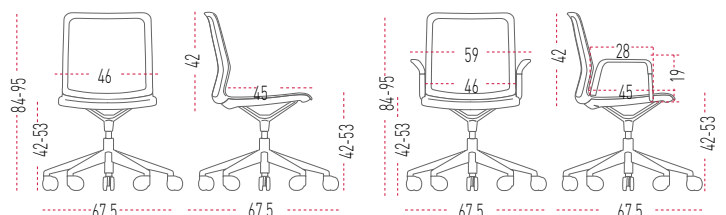



## DESCRIPTION

**Back rest:** Polypropylene + 30%fv + 20%pop frame. Upholstered with foamized fabric composed of polyurethane foam (20Kg/m3) 5mm + fabric "T" or 10mm polyurethane foam (20Kg/m3) + fabric M.

**Seat:** Polypropylene (P.P) with 40 % fiber glass, Upholstered with an ergonomic padded interior (40Kg/m3) in different finishes.

**Arms:** Ability to incorporate fibreglass into polypropylene (P.P) arms for reinforcement.

**Frame:** **Swivel base:** 5 spoke swivel base of cast aluminum or polyamide with fiber glass and standard silent wheels. Gas lift.

**Knee Tilt Mechanism:** Allows a backrest inclination of 10° and pressure regulation 5 positions. Optional soft hole weight control castor in models with aluminium base.



## BASES



Polished aluminum - Ø 67,5 cm  
Black soft castors - Ø 65 mm  
Optional: soft hole weight control castor - Ø 65 mm



White aluminum - Ø 67,5 cm  
Black soft castors - Ø 65 mm  
Optional: soft hole weight control castor - Ø 65 mm



Aluminized aluminum - Ø 67,5 cm  
Black soft castors - Ø 65 mm  
Optional: soft hole weight control castor - Ø 65 mm



Black polyamide - Ø 67,5 cm  
Black soft castors - Ø 65 mm



White polyamide - Ø 67,5 cm  
Black soft castors - Ø 65 mm

## DIMENSIONS



Total Height: 840-950 mm  
Total Width: 675 mm  
Total Depth: 675 mm

Seat Height: 420-530 mm  
Seat Width: 460 mm  
Seat Depth: 450 mm


- ① Polyamide frame manufactured with glass fibre
- ② Models with and without polypropylene arms (P.P)
- ③ Upholstered seat with an ergonomic padded interior, in different finishes
- ④ Cast aluminum framework, in white or aluminum finishes
- ⑤ Gas lift
- ⑥ **Knee Tilt Mechanism:** Allows a backrest inclination of 10° and pressure regulation 5 positions
- ⑦ Base of 67,5 cm in finishes of **black polyamide, white polyamide, silver aluminum, white aluminium and polished aluminum**
- ⑧ Soft castors - Ø 65 mm



## KNEE TILT MECHANISM



Allows a backrest inclination of 10° and pressure regulation 5 positions

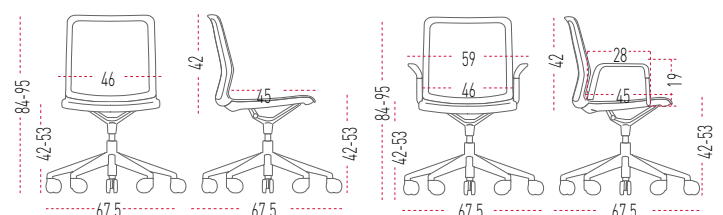



## MATERIALS

Maximum use of materials to eliminate and minimize scraps. Use of recyclable and recycled materials in those components that do not affect the functionality and durability.

**12,97%**  
RECYCLED  
MATERIALS



## PRODUCTION

Maximum optimization of energy use. Minimal environmental impact. Last generation technological systems. Zero discharge of wastewater. No VOC coatings. Processes free of heavy metals, phosphates, OC and COD.

**100%**  
RECYCLABLE  
ALUMINIUM, STEEL  
& WOOD



## TRANSPORT

Detachable systems. Volumes that facilitate the optimization of space. Maximum reduction of energy consumption by transport.

**100%**  
RECYCLABLE  
PACKAGE AND THINNER  
FREE



## USE

Quality and warranty. Long lasting. Replacements available.

**EASY**  
TO CLEAN  
AND MAINTAIN



## DISPOSAL

Waste reduction. Supplier-manufacturer packaging reuse system. Components are easy to be separated. Inks in packaging are water-based, without solvents.

**85,47%**  
RECYCLABLE  
MATERIALS

## ■ CERTIFICATES AND REFERENCES

The different programmes get points in different environmental categories to get the LEED certificate (sustainability, material and resources, water, energy and atmosphere, inner environment quality, innovation and design).



The mark of  
responsible forestry



EN ISO 14006:2011  
ECODESIGN Certificate



UNE-EN ISO 9001:2008  
ISO 9001 Certificate



UNE-EN ISO 14001:2004  
ISO 14001 Certificate



E1 Certificate  
by EN 13986



ACTIU TECHNOLOGY PARK  
LEED® PLATINUM certified by USGBC  
Leadership in Energy & Environmental Design  
LEED® Gold certified 2011 - LEED® Platinum certified 2017

## ■ STANDARDS


**URBAN** has passed tests done in our technical department as well as the tests done in **AIDIMA** the Technological Institute for furniture.

The tests correspond to:


### Confident office chair. Standard applied

- **UNE-EN 15373:07.** Furniture. Resistance, long lasting, security. Requirements for non domestic use seating.
- **UNE-EN 1728:01.** Domestic furniture - Seating - Test methods for the determination of strength and durability.
- **UNE-EN 16139:13.** Furniture. Resistance, long lasting, security. Requirements for non domestic use seating.

4 legged chair with writing tablet




With weight more than 15 kg.  
**Without a seated user,** the chair overturns.




**With a seated user,** maximum  
resistance of writing tablet 40 kg.

Fabric - Back&Seat

Fabric T - Newport

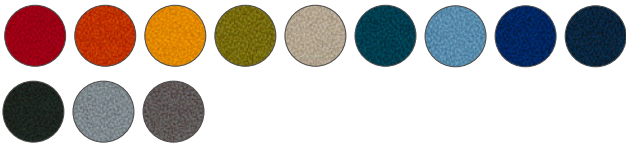

Fabric M - Melang & Step

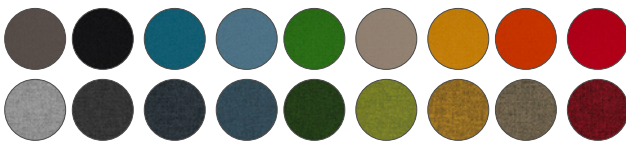

Fabric N - Portus B



Fabric V - Valencia



Fabric D - Felicity



Fabric A - Synergy



Available structure combinations



White frame




Black frame




- Structure: **White**
- Framework: **White**
- Lower cover: **White**



- Structure: **Black**
- Framework: **Black**
- Lower cover: **Black**



- Structure: **Silver**
- Framework: **Silver**
- Lower cover: **Black**



- Structure: **Chromed**
- Framework: **Black**
- Lower cover: **Black**